

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 April 2002 (18.04.2002)


PCT

(10) International Publication Number  
**WO 02/32170 A1**

- (51) International Patent Classification<sup>7</sup>: **H04Q 7/24**,  
H04L 12/66, 29/06
- (21) International Application Number: **PCT/EP00/09886**
- (22) International Filing Date: 9 October 2000 (09.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HULKKONEN, Tony** [FI/FI]; Nokia Networks OY, Keilalahdentie 4, FIN-02150 Espoo (FI). **RAJANIEMI, Jaakko** [FI/FI]; Nokia Networks OY, Keilalahdentie 4, FIN-02150 Espoo (FI). **SIVANANDAN, Mohan** [FI/FI]; Taivaanvuohentie 10 A 13, FIN-00200 Helsinki (FI). **TUOHINO, Markku** [FI/FI]; Nokia Networks OY, Keilalahdentie 4, FIN-02150 Espoo (FI). **HURTTA, Tuija** [FI/FI]; Kiskottajankuja 4 D 49, FIN-02660 Espoo (FI).
- (74) Agents: **LESON, Thomas, Johannes, Alois et al.**; Tiedtke-Bühling-Kinne, Bavariaring 4, 80336 Munich (DE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: ADDRESS DE-REGISTRATION IN IP MULTIMEDIA NETWORKS

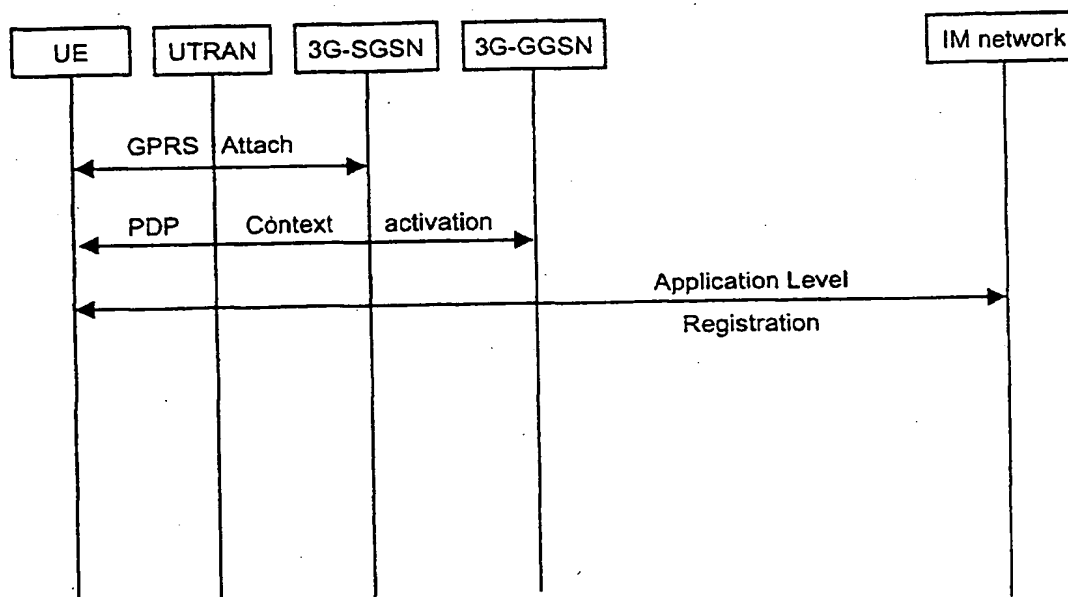

(57) Abstract: According to one aspect, a communication network system comprising at least one first network (GPRS) and at least one second network providing application services over the first network is described. The first network allocates an IP address used by the second network. The system comprises means for detecting that the IP address allocated to a user equipment is de-allocated by the first network and means for initiating a de-registration of the de-allocated IP address in the second network. (Fig. 1)

WO 02/32170 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- 1 -

TITLE OF THE INVENTION

ADDRESS DE-REGISTRATION IN IP MULTIMEDIA NETWORKS

5 FIELD OF THE INVENTION

The present invention relates to the de-registration of IP addresses assigned to users in an access network like GPRS (General Packet Radio Service) and IP (Internet Protocol) Multimedia networks.

BACKGROUND OF THE INVENTION

The future VoIP (Voice over IP) networks are being designed using the layered approach, consisting of IM (IP Multimedia) networks providing the Application Level services over some Transport Level access network with maximum possible independence between the two layers. The 3GPP standardization efforts for R00 were focused on GPRS as the Transport Level access network.

In order to access the IP Multimedia services via the GPRS access network, the UE (UE refers to User Equipment or Application; whenever UE or User Equipment is referred to later in this document, it may also refer to possible User Agent or Application) must perform GPRS attach and activate the necessary PDP (Packet Data Protocol) context first, before registering with the IM network. During the PDP context activation, the GPRS network (GGSN (Gateway GPRS Support Node), more specifically) allocates to the UE an IP address, which is used by the GPRS network to address the UE. This IP address is conveyed to the IM network during the application level registration and is used also by the IM network to address the UE.

35

- 2 -

In most of the cases, the IP addresses are allocated to the user dynamically by the GPRS network during the PDP context activation. This can be arranged by two ways: either a GGSN has a pool of IP addresses or the DHCP (Dynamic Host  
5 Configuration Protocol) server allocates the address. An IP address thus allocated is freed when the PDP context is deactivated explicitly by the UE performing PDP context deactivation or implicitly, for example, after the UE becomes unreachable or fails to perform a periodic routing area  
10 update (RAU). The same IP address could be re-allocated to a different user by the GPRS network.

It may be possible that the UE explicitly performs PDP context deactivation with the GPRS network but does not  
15 perform any specific de-registration with the IM network. It is also possible that a PDP context associated with the UE is implicitly deactivated by the GPRS network for some reason as mentioned above. In all these situations, the IM network is not aware that the IP address of the UE has become invalid,  
20 or even worse, the IP address has been allocated to another user. In the later case, messages coming from the IM network (e.g., in call setup) might be delivered to a different UE which happens to use that IP address at present.

## 25 SUMMARY OF THE INVENTION

It is an object of the present invention to provide consistency of IP addresses assigned to users in an access network and networks providing application services through  
30 the access network.

According to one aspect of the present invention, this object is achieved by a communication network system comprising at least one first network (GPRS) and at least one second  
35 network providing application services over the first

- 3 -

network, the first network allocating an IP address used by the second network, said system comprising:

means for detecting that the IP address allocated to a user equipment is de-allocated by the first network; and

5 means for initiating a de-registration of the de-allocated IP address in the second network.

The system may further comprise a control entity (PCF) being arranged to communicate with a gating network element (GGSN) in the first network and a dedicated call serving network element (CSCF) in the second network, the dedicated call serving network element serving the requested application,

wherein the gating network element detects a communication channel deactivation, and informs the control entity thereof,

15 wherein the control entity detects that the deactivated communication channel represents a signaling PDP context and initiates the de-registration in the dedicated call serving network element.

20

The gating network element may supply an indication of the signaling PDP context to the control entity.

The control entity may detect that the deactivated communication channel represents a signaling PDP context by checking request state information in the control entity.

25 The gating network element may be informed by a serving network element in the first network about a communication channel deactivation and forwards this information to the control entity.

Moreover, a network element in the first network may detect the de-allocation of the IP address and informs a server about the de-allocation, and the server initiates de-

35

- 4 -

registration in call serving network elements in the second network, to which said IP-address is associated with.

The server may be a home subscriber server (HSS).

5

A network element (SGSN) in the first network may inform a database (HLR) about the de-allocation, the home database informs a mobility serving entity (UMS) about the de-allocation, and the mobility serving entity initiates the de-  
10 registration in a dedicated call serving network element (CSCF) in the second network, the dedicated call serving network element serving the requested application.

Furthermore, the network element in the first network may  
15 detect a detach of the user equipment causing the de-allocation for all IP addresses of the user equipment and inform the server about the de-allocation, and the server initiates de-registration in all call serving network elements of the user equipment.

20

A gating network element (GGSN) in the first network stores addresses of call serving network elements proposed to the user equipment against the allocated IP address and a user identification, the gating network element allocating the IP  
25 address and being involved in the discovery procedure of a call serving network element (CSCF) in the second network, the call serving network elements being able to serve the requested application, and, when the gating network element detects the de-allocation of the IP address, it initiates de-  
30 registration in all stored call serving network elements associated with the IP addresses in the second network.

The user equipment may inform a gating network element (GGSN) in the first network whenever it registers with a call  
35 serving network element (CSCF) in the second network, the gating network element allocating the IP address and being

- 5 -

involved in the discovery procedure of a call serving network element (CSCF) in the second network, the call serving network elements being able to serve the requested application, wherein the gating network element stores  
5 addresses of the registered call serving network elements against the allocated IP addresses and a user identification, and, when the gating network element detects the de-allocation of the IP addresses, it initiates the de-registration in all stored call serving network nodes  
10 associated with the IP addresses.

The de-allocation of the IP address caused by a communication channel deactivation may be detected by a gating network element in the first network, and the server is informed by  
15 the gating network element about the de-allocation.

Moreover, a de-allocation of the IP address caused by a detach of the user equipment is detected by a serving network element (SGSN) in the first network, and the home server is  
20 informed by the serving network element about the de-allocation.

The server may be informed by the user equipment about all call serving network elements the user equipment is  
25 registered with.

The IP address may be de-registered in the second network by deleting a record in a home server (HSS) in the first network by a call serving network element in the second network.  
30

An IP address may be allocated for each communication channel request performed by the user equipment.

The initiation of the de-registration may comprise the supply  
35 of a de-register message.

- 6 -

The first network may be a wireless access network and the second network may be an IP multimedia network.

In addition, the communication channel by be a PDP context.

5

Furthermore, the above-mentioned object is achieved by a control entity which is arranged to communicate with a gating network element (GGSN) in a first network and a dedicated call serving network element (CSCF) in a second network providing application services over the first network, the first network allocating an IP address used by the second network, the dedicated call serving network element serving the requested application,

wherein the control entity receives information from the gating network element about a communication channel deactivation

wherein the control entity detects that the deactivated communication channel represents a signaling PDP context and initiates the de-registration in the dedicated call serving network element.

Moreover, the above-mentioned object is achieved by a method of providing communication between at least one first network (GPRS) and at least one second network providing application services over the first network, the first network allocating an IP address used by the second network, said method comprising:

detecting that the IP address allocated to a user equipment is de-allocated by the first network; and  
initiating a de-registration of the de-allocated IP address in the second network.

The invention applies to cases when the UE explicitly or implicitly de-registers with the access network and its IP address is freed. Of course, after this has happened, the UE is not capable of communicating with the CSCF. For example,



- 7 -

an explicit de-allocation comprises a PDP context deactivation or an explicit detach procedure when the UE is switched off. An implicit de-allocation occurs, for example, when the UE fails to perform a periodic routing area update.

5

Users may be registered with multiple CSCFs of different IM networks, and the same user may have more than one IP addresses assigned.

10 The PCF functionality can be provided in a separate network element or may be contained in another network element like CSCF.

15 In the following the present invention will be described by way of embodiments thereof with reference to the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1 shows a signaling diagram of an IP multimedia service access via GPRS access network.

Fig. 2 shows a signaling diagram of a de-register procedure caused by an IP address de-allocation according to  
25 an embodiment of the present invention.

Fig. 3 shows a signaling diagram of a de-register procedure caused by a PDP context deactivation according to a first preferred embodiment of the present invention.

30

Fig. 4 shows a signaling diagram of a de-register procedure caused by a PS detach according to an embodiment of the present invention.

- 8 -

Fig. 5 shows a signaling diagram of a de-register procedure caused by a PDP context deactivation according to a second preferred embodiment of the present invention.

- 5 Fig. 6 shows a signaling diagram of a de-register procedure caused by PS detach according to the second preferred embodiment of the present invention.

#### DESCRIPTION OF THE PRESENT INVENTION

10

Fig. 1 shows a signaling diagram, schematically illustrating a GPRS attach performed by a UE (User Equipment) towards a GPRS (General Packet Radio Service) network via a UTRAN (Universal Terrestrial Radio Access Network). Before  
15 registering with an IM (IP Multimedia) network via a CSCF (Call Server Control Function), the UE has also to activate a PDP context towards a 3G-GGSN (Third Generation Gateway GPRS Support Node) via a 3G-SGSN (Third Generation Serving GPRS Support Node). The GGSN allocates to the UE an IP address  
20 which is used by the GPRS network to address the UE. This IP address is conveyed to the IM network during the application level registration by the UE or the User Application.

The UE may have multiple PDP Contexts activated with GPRS and  
25 have multiple IP addresses in use. Moreover, the UE may be registered with multiple CSCFs, where each CSCF may have multiple IP addresses for the same user, depending on the application or service.

30 In order to solve the above-described problem of inconsistent IP addresses used by the GPRS and the IM networks to address the users, arising due to the situation when an IP address assigned to a UE is de-allocated by the GPRS network for explicit or implicit reasons without the IM network knowing  
35 it, the IM network should be somehow informed about the de-allocation of the IP address assigned to a UE. As a minimal

- 9 -

solution, the GPRS network must at least detect messages and data intended for the UE which had been assigned the now de-allocated IP address and discard them.

- 5 In situations where IM network cannot be informed about the release or reallocation of a UE IP address and the SGSN/GGSN does not "sniff" the mobile terminated call/session setups, the IM network must authenticate the user in every mobile terminated transaction to make sure that it is still the same  
10 user reached at the IP address which the CSCF has registered for a particular user. This, however, does not solve the problem of signaling messages being sent to a wrong target, but reduces the seriousness of the problem, as this would make sure that the mobile terminated setup fails due to  
15 authentication failure, though some signaling takes place.

Moreover, the UEs may be required to perform periodic registration updates at certain time intervals as agreed by the UE and the IM network during the first registration. A  
20 registration performed with a CSCF in an IM network would terminate if the UE does not perform a periodic registration update. This, however does not completely solve the above-described problem since the UE may have a longer duration for periodic registration updates than the one at the GPRS level  
25 for periodic routing area update and the two procedures may not be synchronized. Further, the possibility of explicit GPRS level deactivation while there is a valid IM level registration would still cause the above-mentioned problem.

- 30 These approaches merely reduce the chances or seriousness of the above-described problem. In the following, embodiments of the present invention are described, which provide complete solutions of the problem.

- 10 -

Fig. 2 shows a signaling diagram illustrating an IP address de-registration according to an embodiment of the present invention.

5 In order to register for IM network services, the UE is required to select a CSCF in the IM network with the assistance of the GPRS network, i.e. the GGSN, known as CSCF discovery procedure. Hence, the GGSN is aware of the CSCFs proposed to the UE. The GGSN also stores the addresses of the  
10 proposed CSCFs against the allocated IP address of the user and the IMSI (International Mobile Subscriber Identity), which identifies the user in the GPRS network. When the IP address of the user is de-allocated (Fig. 2: 1. IP address de-allocation) due to explicit reasons, i.e. when the UE  
15 performs a PDP context deactivation, or due to implicit reasons, i.e. after the UE becomes unreachable or fails to perform a periodic routing area update, the GGSN informs about this to all the proposed CSCFs (communication 2 in Fig. 2: the 3G-GGSN transmits a de-register message to the CSCFs),  
20 which were stored in the table. Thereupon, the CSCFs may acknowledge by sending a de-register Ack message (communication 3 in Fig. 2) to the GGSN. The CSCFs initiate the de-registration upon receiving the de-register message from the GGSN (Fig. 2: 4. De-registration).

25 In particular, in case of an explicit PDP context deactivation, the UE may choose to deactivate just one or two PDP contexts while it continues to have the rest of PDP contexts active. In this case, only the IP addresses  
30 allocated by the deactivated PDP contexts will be de-allocated while the UE continues to use other existing IP addresses. These de-allocated IP addresses may be used to address the UE by one or more CSCFs. Hence, in this case, the GGSN notifies only the one or more CSCFs using the  
35 deallocated IP addresses to address the particular UE.

- 11 -

In the case of an implicit PDP context activation, the GPRS may de-activate all the active PDP contexts and IP addresses for that particular UE. Hence, in this case, the GGSN notifies all CSCFs of the particular UE for all IP addresses.

5

The GGSN must have up-to-date knowledge of the IP addresses used by a UE and the CSCFs the UE is registered to.

Therefore, every time the UE performs a new registration or de-registration, the GGSN must be aware of it.

10

The disadvantage of this solution is that the CSCFs which were not selected by the UE will also be notified. This can be avoided by informing the GGSN providing the addresses of the CSCFs (or logical names that can be used to get the actual address), whenever the UE registers with one or more CSCFs for service. The GGSN stores the addresses of the CSCFs against the allocated IP address of the user and the IMSI. When the IP address of the user is de-allocated, the GGSN informs about this to all those CSCFs, which were stored.

15

When the UE de-registers with a CSCF too, it notifies the GGSN, so that the GGSN can remove this CSCF from the stored list. This way, only the CSCFs the UE has actually been registered to are notified by the GGSN.

20

Moreover, the mobile-terminated call/session setup message from the CSCF can be defined to contain also a user identifier like IMSI, which is the subscriber identity at GPRS level. The GGSN checks all the mobile-terminated call setup messages and compares them against its list of active IMSIs and the corresponding IP addresses. If the received IMSI and IP address pair is not found, the GGSN discards the data. Optionally the GGSN could also notify the CSCF about the situation if the CSCF address is known.

30

Fig. 3 shows a signaling diagram illustrating a de-registration procedure due to a PDP context deactivation

35

- 12 -

according to a first preferred embodiment of the present invention.

The preferred first embodiment utilizes a PCF (Policy Control  
5 Function) to relay the indication on IP address de-allocation  
from the access network to the IM network. In general, the  
task of Policy Control is to divide the available network  
resource in a defined manner over the set of network users  
competing for that resource. Policy Control enforces a  
10 connection admission policy. A connection admission policy is  
a set of rules defining under what circumstances (other than  
the mere availability of the requested resource) the request  
for a logical connection is to be accepted.

15 The PCF is able to communicate with the GGSN and the CSCF.  
(It may also be possible for the PCF functionality to be  
incorporated into the CSCF or GGSN.) The UE needs a PDP  
context in order to communicate with the proxy CSCF. The PCF  
is informed about deactivating the signaling PDP context. As  
20 it is shown in communication 1 in Fig. 3, the signaling PDP  
context is deactivated in the GPRS network. Thereupon, the  
GGSN sends a Delete Request State (Request Id) message to the  
PCF (communication 2 in Fig. 3). The PCF notices that the  
deactivated PDP context is a signaling PDP context. This may  
25 happen either by receiving an indication of the signaling PDP  
context from the GGSN or by checking the request state  
information in the PCF. In communication 3 in Fig. 3, the PCF  
sends a De-register (Subscriber Id) message to the proxy  
CSCF. The PCF may also send the de-register message to a  
30 serving CSCF serving the IM network application requested by  
the UE.

The proxy CSCF may acknowledge by sending a De-register Ack  
(Subscriber Id) message to the PCF (communication 4 in Fig.  
35 3). Then, the proxy CSCF initiates de-registration (Fig. 3:

- 13 -

5. De-registration) by informing the HSS about the de-registration.

When the UE deactivates its PDP contexts, the SGSN knows  
5 about it and forwards information (about the latest deactivated PDP context) to the GGSN. The GGSN forwards the information to the PCF, and the PCF forwards it to the CSCF.

The access network can also trigger de-registration from the  
10 IP multimedia services when the UE performs a PS detach, i.e. when the IP address assigned to the UE is de-allocated implicitly as mentioned above. This case is shown in Fig. 4, illustrating a de-registration due to PS detach according to an embodiment of the present invention. In case of a PS  
15 detach (Fig. 4: 1. PS detach), the SGSN informs an HLR (Home Location Register) by performing the Purge procedure (communication 2 in Fig. 4). The HLR in turn informs a UMS (User Mobility Server) about the PS detach (communication 3 in Fig. 4), which then informs the CSCF (communication 4 in  
20 Fig. 4). When receiving the information, the CSCF initiates de-registration (communication 4 in Fig. 4). The CSCF may send a De-register Ack message (communication 5 in Fig. 4) to the UMS.

25 Fig. 5 shows a signaling diagram illustrating a de-registration due to a PDP context deactivation according to a second preferred embodiment of the present invention. When the PDP context is deactivated in the GPRS network, the GGSN indicates to an HSS (Home Subscriber Server) about it (Fig.  
30 5: 2. IP address de-allocation). The HSS knows all possible CSCFs the UE has been registered with, and therefore, it informs the relevant CSCFs in sending de-register messages (communication 3 in Fig. 5). The relevant CSCFs may send de-register Ack messages to the HSS and initiate de-  
35 registration.

- 14 -

In the case of an explicit PDP context deactivation, the GGSN notifies the HSS about the particular UE and only the de-allocated IP addresses and then the HSS updates its own record and notifies only the one or more CSCFs using the  
5 deallocated IP addresses to address the particular UE.

Fig. 6 shows the case of a de-registration due to a PS detach according to the second preferred embodiment. For example, if the UE fails to perform the periodic routing area update, the  
10 SGSN informs the HSS about it by performing the Purge procedure (communication 2 in Fig. 6), and the HSS in turn notifies the CSCFs serving the UE by sending the de-register message (communication 3 in Fig. 6). The relevant CSCFs may send the de-register Ack message and initiate the de-  
15 registration.

In the case of an implicit PDP context deactivation, the GPRS network de-activates all the active PDP contexts and IP addresses for that particular UE. Hence, the de-registration  
20 performed by the HSS is done for all IP addresses and all CSCFs of the particular UE.

The HSS must have up-to-date knowledge of the IP addresses used by a UE and the CSCFs the UE is registered to.  
25 Therefore, every time the UE performs a new registration or de-registration, the HSS must be aware of it.

Though the invention is described referring to GPRS as the wireless access network, the principles of the invention can  
30 be applied also to other wireless networks.

While the invention has been described with reference to a preferred embodiment, the description is illustrative of the invention and is not to be construed as limiting the  
35 invention. Various modifications and applications may occur to those skilled in the art without departing from the true



- 15 -

spirit and scope of the invention as defined by the appended claims.

- 16 -

CLAIMS:

1. A communication network system comprising at least one first network (GPRS) and at least one second network providing application services over the first network, the first network allocating an IP address used by the second network, said system comprising:

means for detecting that the IP address allocated to a user equipment is de-allocated by the first network; and  
means for initiating a de-registration of the de-allocated IP address in the second network.

2. A system according to claim 1, further comprising a control entity (PCF) being arranged to communicate with a gating network element (GGSN) in the first network and a dedicated call serving network element (CSCF) in the second network, the dedicated call serving network element serving the requested application,

wherein the gating network element detects a communication channel deactivation, and informs the control entity thereof,

wherein the control entity detects that the deactivated communication channel represents a signaling PDP context and initiates the de-registration in the dedicated call serving network element.

3. A system according to claim 2, wherein the gating network element supplies an indication of the signaling PDP context to the control entity.

30

4. A system according to claim 2, wherein the control entity detects that the deactivated communication channel represents a signaling PDP context by checking request state information in the control entity.

35

- 17 -

5. A system according to claim 2, wherein the gating network element is informed by a serving network element in the first network about a communication channel deactivation and forwards this information to the control entity.

5

6. A system according to claim 1, wherein a network element in the first network detects the de-allocation of the IP address and informs a server about the de-allocation, and the server initiates de-registration in call serving network elements in the second network, to which said IP-address is associated with.

10

7. A system according to claim 6, wherein the server is a home subscriber server (HSS).

15

8. A system according to claim 6, wherein a network element (SGSN) in the first network informs a database (HLR) about the de-allocation, the home database informs a mobility serving entity (UMS) about the de-allocation, and the mobility serving entity initiates the de-registration in a dedicated call serving network element (CSCF) in the second network, the dedicated call serving network element serving the requested application.

20

9. A system according to claim 6, wherein the network element in the first network detects a detach of the user equipment causing the de-allocation for all IP addresses of the user equipment and informs the server about the de-allocation, and the server initiates de-registration in all call serving network elements of the user equipment.

30

10. A system according to claim 6, wherein a gating network element (GGSN) in the first network stores addresses of call serving network elements proposed to the user equipment against the allocated IP address and a user identification,

35

- 18 -

the gating network element allocating the IP address and being involved in the discovery procedure of a call serving network element (CSCF) in the second network, the call serving network elements being able to serve the requested application, and, when the gating network element detects the de-allocation of the IP address, it initiates de-registration in all stored call serving network elements associated with the IP addresses in the second network.

11. A system according to claim 6, wherein the user equipment informs a gating network element (GGSN) in the first network whenever it registers with a call serving network element (CSCF) in the second network, the gating network element allocating the IP address and being involved in the discovery procedure of a call serving network element (CSCF) in the second network, the call serving network elements being able to serve the requested application, wherein the gating network element stores addresses of the registered call serving network elements against the allocated IP addresses and a user identification, and, when the gating network element detects the de-allocation of the IP addresses, it initiates the de-registration in all stored call serving network nodes associated with the IP addresses.

12. A system according to claim 6, wherein a de-allocation of the IP address caused by a communication channel deactivation is detected by a gating network element in the first network, and the server is informed by the gating network element about the de-allocation.

13. A system according to claim 6, wherein a de-allocation of the IP address caused by a detach of the user equipment is detected by a serving network element (SGSN) in the first network, and the home server is informed by the serving network element about the de-allocation.

- 19 -

14. A system according to claim 6, wherein the server is informed by the user equipment about all call serving network elements the user equipment is registered with.

5

15. A system according to claim 1, wherein the IP address is de-registered in the second network by deleting a record in a home server (HSS) in the first network by a call serving network element in the second network.

10

16. A system according to claim 1, wherein an IP address is allocated for each communication channel request performed by the user equipment.

15

17. A system according to any one of the preceding claims, wherein the initiation of the de-registration comprises the supply of a de-register message.

18. A system according to any one of the preceding claims,  
20 wherein the first network is a wireless access network.

19. A system according to any one of the preceding claims, wherein the second network is an IP multimedia network.

25 20. A system according to any one of the preceding claims, wherein the communication channel is a PDP context .

21. A control entity which is arranged to communicate with a  
gating network element (GGSN) in a first network and a  
30 dedicated call serving network element (CSCF) in a second  
network providing application services over the first  
network, the first network allocating an IP address used by  
the second network, the dedicated call serving network  
element serving the requested application,

- 20 -

wherein the control entity receives information from the gating network element about a communication channel deactivation

5 wherein the control entity detects that the deactivated communication channel represents a signaling PDP context and initiates the de-registration in the dedicated call serving network element.

22. A method of providing communication between at least one  
10 first network (GPRS) and at least one second network providing application services over the first network, the first network allocating an IP address used by the second network, said method comprising:

15 detecting that the IP address allocated to a user equipment is de-allocated by the first network; and

initiating a de-registration of the de-allocated IP address in the second network.

23. A method according to claim 22, further comprising the  
20 step of:

providing a control entity (PCF) being arranged to communicate with a gating network element (GGSN) in the first network and a dedicated call serving network element (CSQF) in the second network, the dedicated call serving network  
25 element serving the requested application,

detects a communication channel deactivation by the gating network element and informing the control entity thereof,

30 wherein when it is detected by the control entity that the deactivated communication channel represents a signaling PDP context, the de-registration in the dedicated call serving network element is initiated.

24. A method according to claim 23, wherein an indication of  
35 the signaling PDP context is supplied to the control entity by the gating network element.

- 21 -

25. A method according to claim 23, wherein it is detected by the control entity that the deactivated communication channel represents a signaling PDP context by checking request state  
5 information in the control entity.

26. A method according to claim 23, wherein the gating network element is informed by a serving network element in the first network about a communication channel deactivation  
10 and this information is forwarded to the control entity.

27. A method according to claim 22, wherein the de-allocation of the IP address is detected by a network element in the first network and a server is informed about the de-  
15 allocation, and de-registration is initiated in call serving network elements in the second network, to which said IP-address is associated with.

28. A method according to claim 27, wherein the server is a  
20 home subscriber server (HSS).

29. A method according to claim 27, wherein a database (HLR) is informed by a network element (SGSN) in the first network about the de-allocation, a mobility serving entity  
25 (UMS) is informed by the home database about the de-allocation, and the de-registration is initiated by the mobility serving entity in a dedicated call serving network element (CSCF) in the second network, the dedicated call serving network element serving the requested application.

30

30. A method according to claim 27, wherein a detach of the user equipment causing the de-allocation for all IP addresses of the user equipment is detected by the network element in the first network and the server is informed about the de-  
35 allocation by the network element, and de-registration in all

- 22 -

call serving network elements of the user equipment is initiated by the server.

31. A method according to claim 27, wherein addresses of call  
5 serving network elements proposed to the user equipment  
against the allocated IP address and a user identification  
are stored in a gating network element (GGSN) in the first  
network, the gating network element allocating the IP address  
and being involved in the discovery procedure of a call  
10 serving network element (CSCF) in the second network, the  
call serving network elements being able to serve the  
requested application, and, when the gating network element  
detects the de-allocation of the IP address, de-registration  
in all stored call serving network elements associated with  
15 the IP addresses in the second network is initiated by the  
gating network element.

32. A method according to claim 27, wherein a gating network  
element (GGSN) in the first network is informed by the user  
20 equipment whenever it registers with a call serving network  
element (CSCF) in the second network, the gating network  
element allocating the IP address and being involved in the  
discovery procedure of a call serving network element (CSCF)  
in the second network, the call serving network elements  
25 being able to serve the requested application, wherein the  
gating network element stores addresses of the registered  
call serving network elements against the allocated IP  
addresses and a user identification, and, when the gating  
network element detects the de-allocation of the IP  
30 addresses, it initiates the de-registration in all stored  
call serving network nodes associated with the IP addresses.

33. A method according to claim 27, wherein a de-allocation  
of the IP address caused by a communication channel  
35 deactivation is detected by a gating network element in the



- 23 -

first network, and the server is informed by the gating network element about the de-allocation.

34. A method according to claim 27, wherein a de-allocation  
5 of the IP address caused by a detach of the user equipment is detected by a serving network element (SGSN) in the first network, and the home server is informed by the serving network element about the de-allocation.
- 10 35. A method according to claim 27, wherein the server is informed by the user equipment about all call serving network elements the user equipment is registered with.
36. A method according to claim 22, wherein the IP address is  
15 de-registered in the second network by deleting a record in a home server (HSS) in the first network by a call serving network element in the second network.
37. A method according to claim 22, wherein an IP address is  
20 allocated for each communication channel request performed by the user equipment.
38. A method according to any one of claims 22 to 37, wherein  
25 the initiation of the de-registration comprises the supply of a de-register message.
39. A method according to any one of claims 22 to 38, wherein the first network is a wireless access network.
- 30 40. A method according to any one of claims 22 to 39, wherein the second network is an IP multimedia network.
41. A method according to any one of claims 22 to 40, wherein the communication channel is a PDP context.

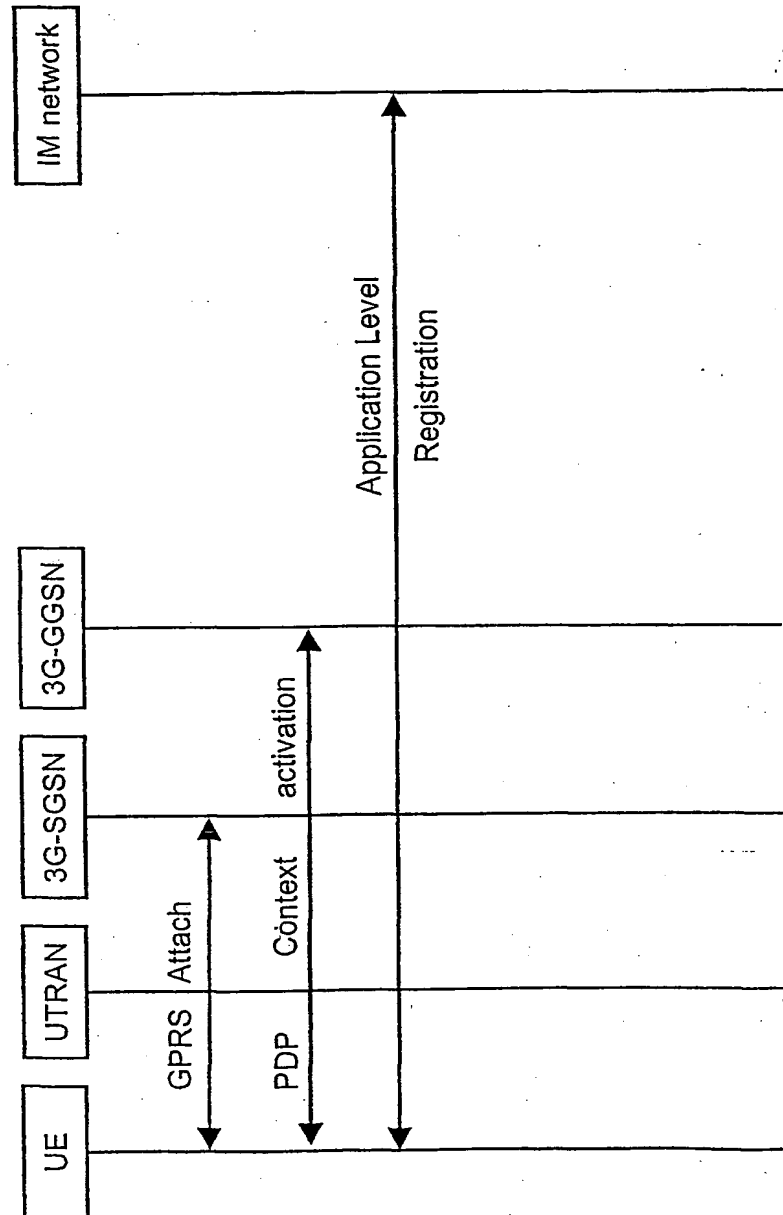


Fig. 1

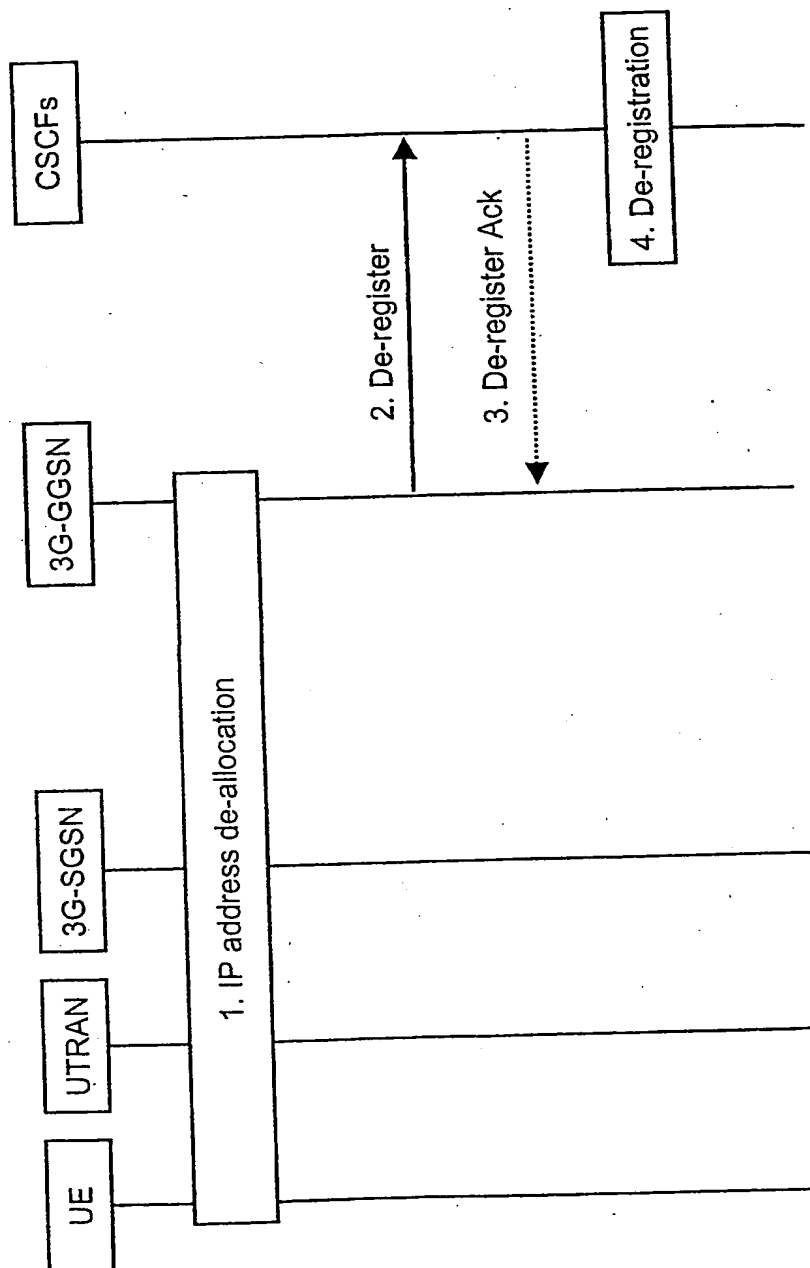


Fig. 2

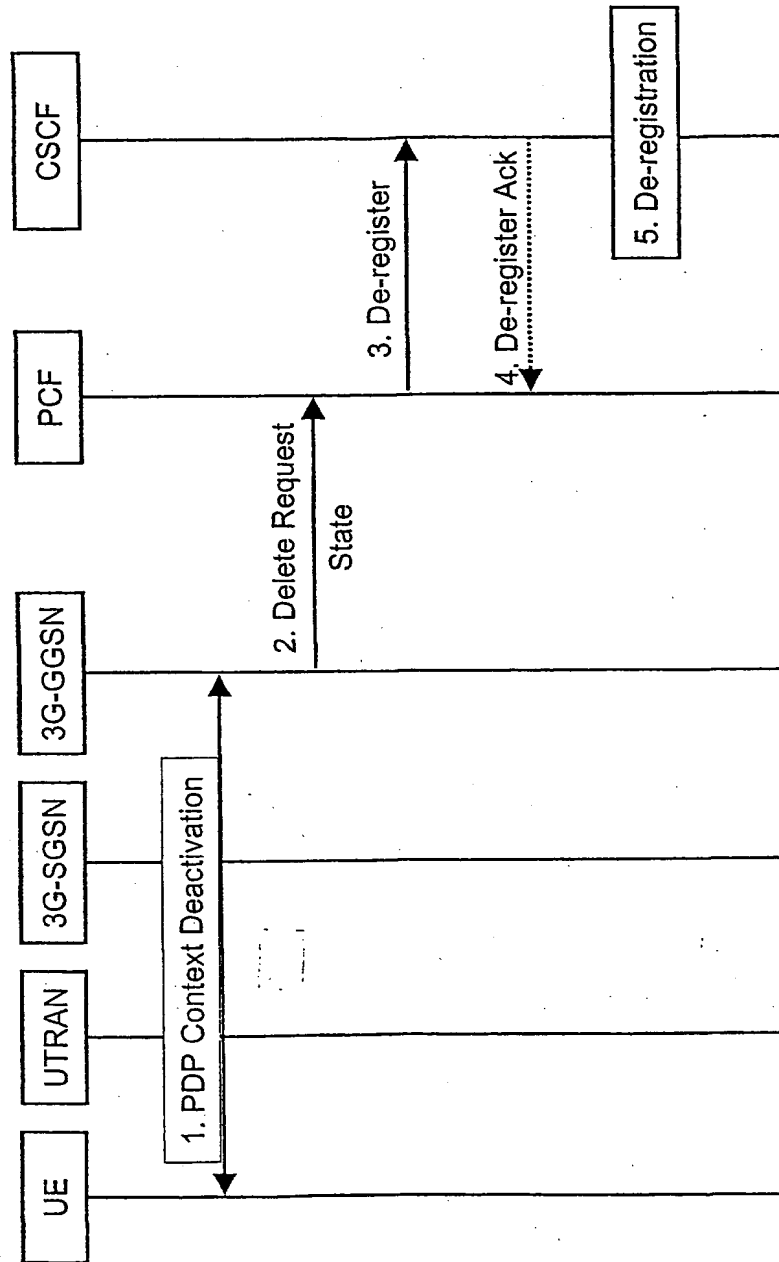


Fig. 3

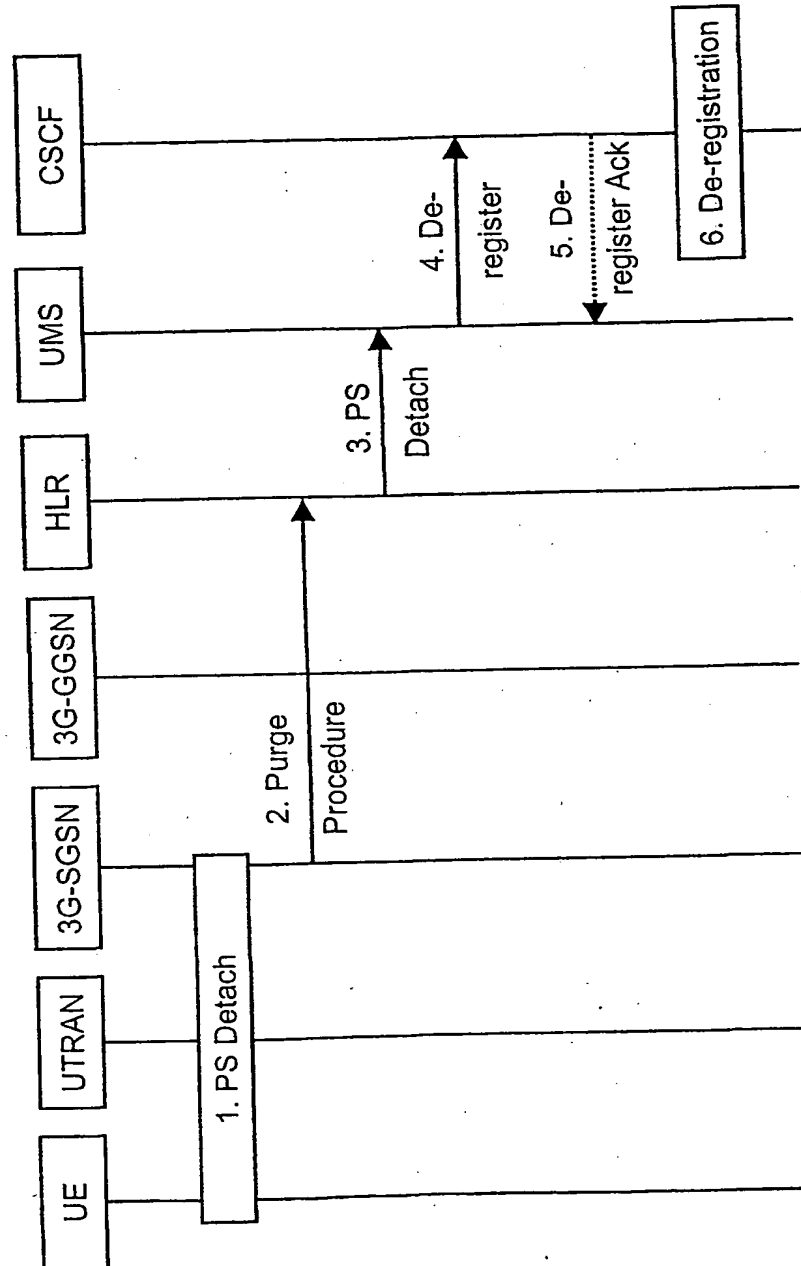


Fig. 4

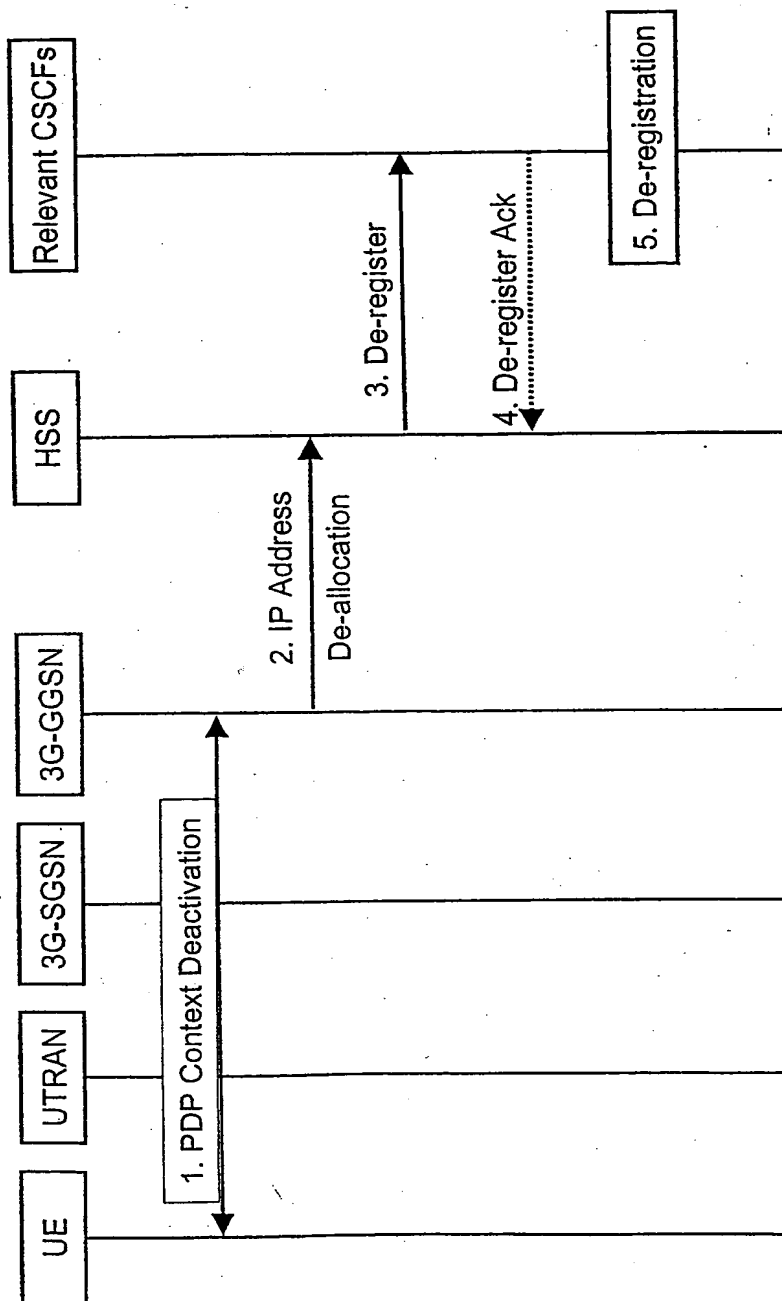


Fig. 5

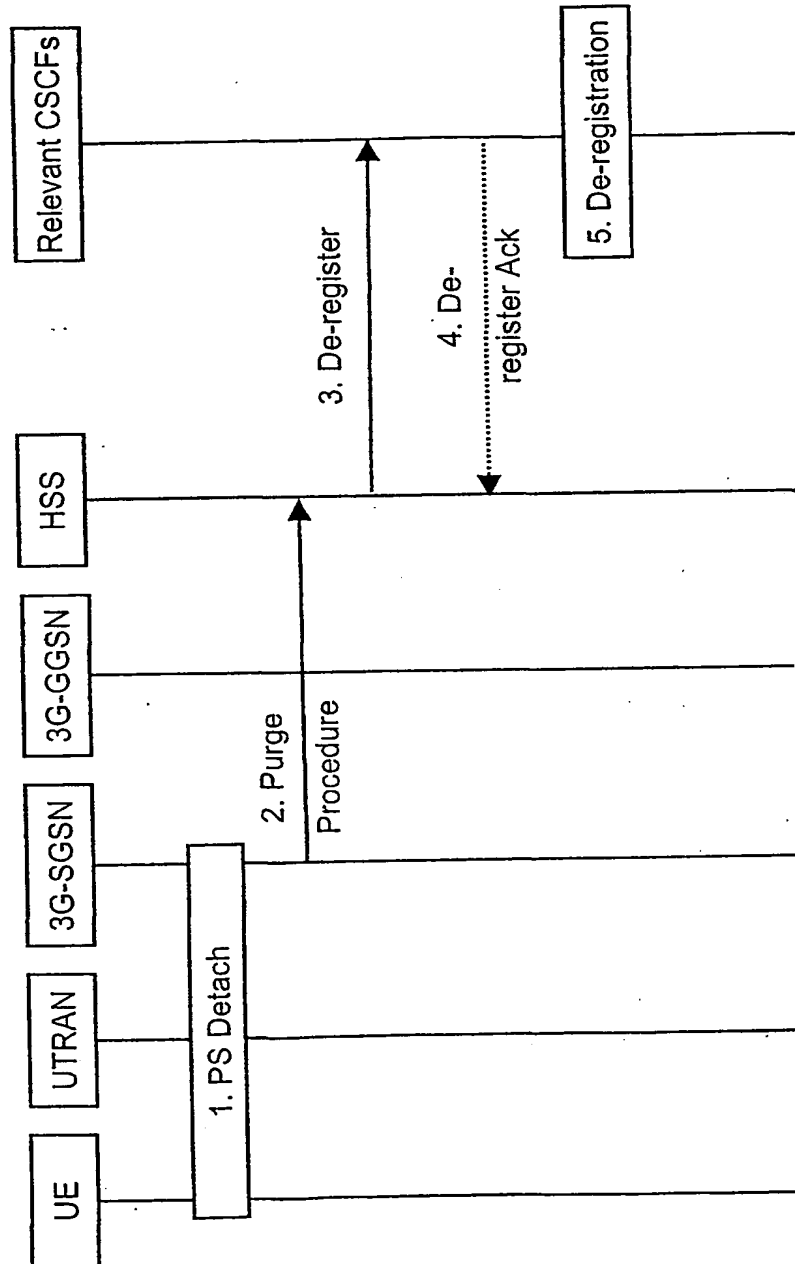


Fig. 6

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/09886

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/24 H04L12/66 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04L H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 61966 A (NOKIA MOBILE PHONES LTD ;TURUNEN MATTI (FI)) 2 December 1999 (1999-12-02)	1,6, 17-20, 22,27, 38-41
A	abstract page 7, paragraph 2 -page 8, paragraph 1  page 9, line 26 -page 10, line 6 page 12, line 21 -page 13, line 31 page 17, line 22 -page 18, line 20 --- -/-	2-5, 7-16,21, 23-26, 28-37

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

14 August 2001

Date of mailing of the international search report

28/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Blanco Cardona, P



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/09886

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PLASSE D: "Call control scenarios in the "all-IP" UMTS core network" PROCEEDINGS 11TH IEEE INTERNATIONAL SYMPOSIUM ON PERSONAL INDOOR AND MOBILE RADIO COMMUNICATIONS. PIMRC 2000, vol. 1, 18 - 21 September 2000, pages 322-326, XP002174862 London, UK page 322, left-hand column, paragraph 1 -page 323, left-hand column, paragraph 1 page 324, left-hand column, paragraph 5 -right-hand column, paragraph 7</p>	<p>2-16,21, 23-37</p>
A	<p>WO 00 24209 A (NOKIA NETWORKS OY ;VERKAMA MARKKU (FI)) 27 April 2000 (2000-04-27) abstract page 1, paragraph 4 page 3, line 4 - line 32 page 5, paragraph 4 page 8, paragraph 3</p>	<p>2-16,21, 23-37</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/09886

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9961966	A	02-12-1999	FI	981184 A	28-11-1999
			AU	4268399 A	13-12-1999
			EP	1082648 A	14-03-2001
WO 0024209	A	27-04-2000	FI	982258 A	20-04-2000
			AU	6343899 A	08-05-2000